




# FT001, FT004, FT005, FT007 and FT008 Cables

High performance interconnection cables for in industrial environments

## FT001 and FT007

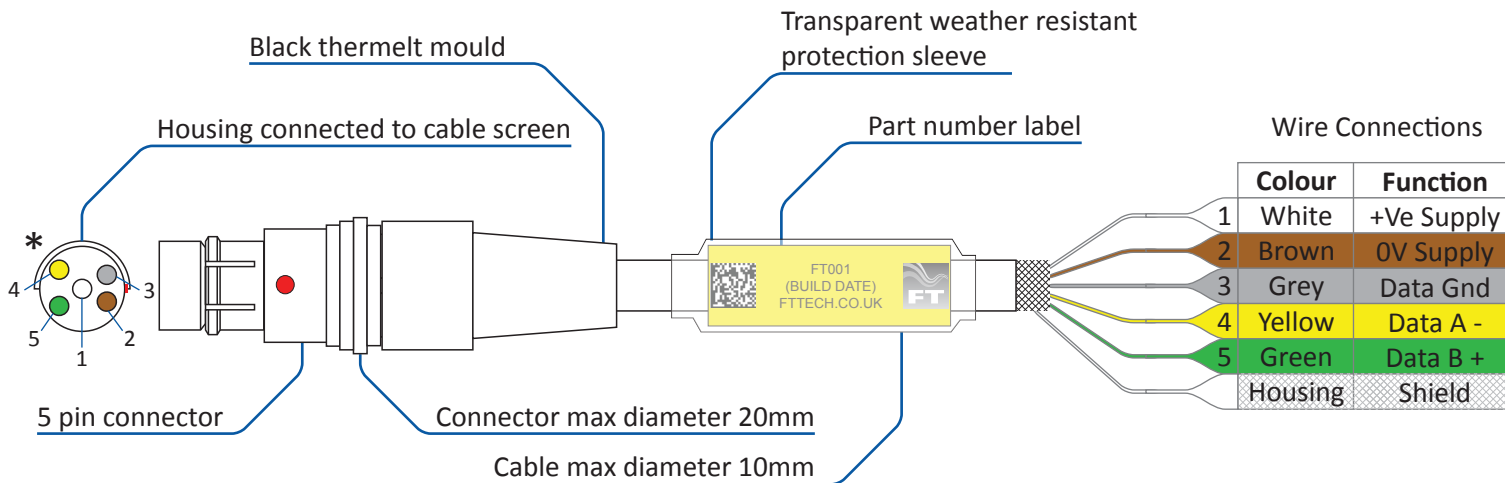


### Specification

Part No.	FT001	FT007
Length	15 m	5 m
Weight	1.3 kg	0.5 kg
Use with	RS485 wind sensors FT702LT, FT722-D & FT742-D	
Temp. Range	-40 to +85°C	
Min. bend radius	57 mm	
Max. Cable Rating	6 A	
Wire thickness	0.5mm <sup>2</sup> / AWG21	

FT can supply stocked cables for fast delivery. For long-term high-volume orders, we recommend direct purchase from the cable manufacturer (Rosenberger). Please contact [info@fttechnologies.com](mailto:info@fttechnologies.com) for further details.

## FT004, FT005 and FT008

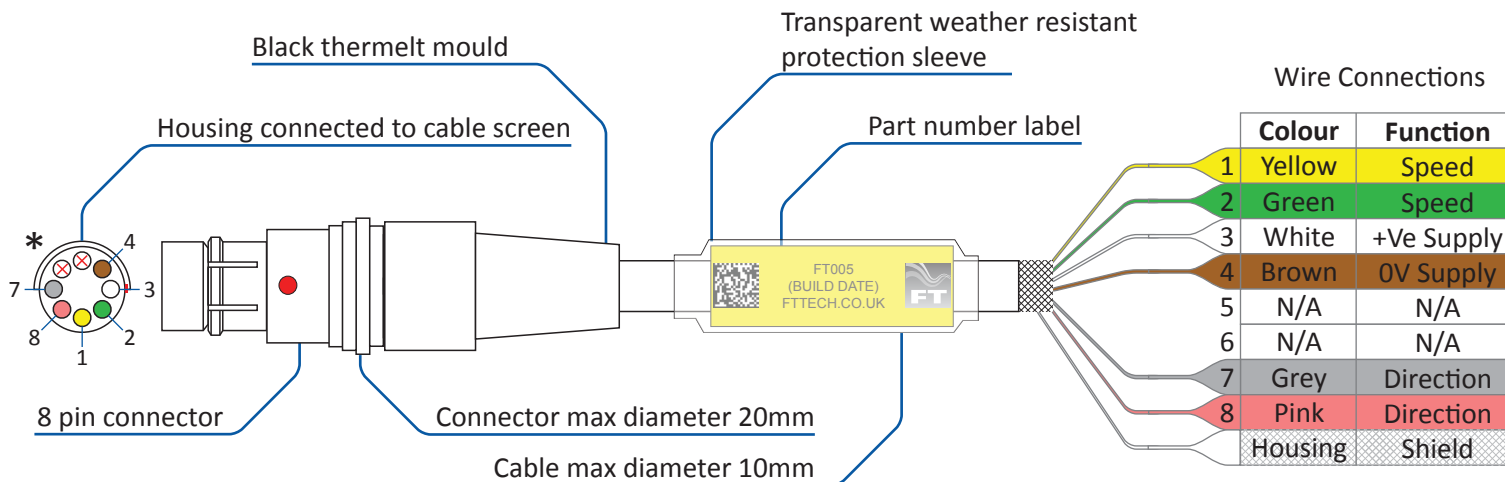

### Specification

Part No.	FT005	FT004	FT008
Length	15 m	8 m	5 m
Weight	1.3 kg	0.7 kg	0.5 kg
Use with	4-20mA wind sensors FT702LT/D, FT722-A & FT742-A		
Temp. Range	-40 to +85°C		
Min. bend radius	57 mm		
Max. Cable Rating	6 A		
Wire thickness	0.5mm <sup>2</sup> / AWG21		

FT can supply stocked cables for fast delivery. For long-term high-volume orders, we recommend direct purchase from the cable manufacturer (Rosenberger). Please contact [info@fttechnologies.com](mailto:info@fttechnologies.com) for further details.

\*View looking into socket contacts of free plug.